


Unique and versatile, the fan head of the Jarold Direcional ceiling fan can be infinitely positioned in a 180-degree arc, forward and reverse, to provide maximum, directional airflow. The Jarold can be hung in small, awkward spaces or in front of HVAC ducts to make more efficient the heating, ventilation or air conditioning of any room. Constructed of cast aluminum, heavy spun and stamped steel, the Jarold Direcional carries a limited lifetime warranty.





















Product Features



Safety Cage Compatible

Soothing White Noise



JAROLD DIRECIONAL

FINISH AND	D BLADE	OPTIONS	
------------	---------	---------	--

SKU#	JD-XXXXXXXXX (Model+Finish+Blade)	
Standard Finishes	Black Bronzette Brushed Nickel	BK BZZT BN
Special Order	Brushed Brass Brushed Copper Polished Brass Polished Chrome Polished Copper Polished Chrome Damp Brushed Nickel Damp Gloss White	BRBR BRCP PB CR CP CRDAMP BNDAMP WH
Fan Blade	Solid Mahogany Wood Blade Metal Blade	WD MTL
T	ECHNICAL SPECS	
Fan Weight	7 lbs	
3.4.11	110 000	

1201111071201200		
Fan Weight	7 lbs	
Voltage	110 or 220	
Motor Type	AC	
Oscillation	No	
Downrods Lengths Field cuttable. Non-threaded	inches: 5, 10, 20, 30 centimeters: 13, 25, 51, 76	
Downrod Diameter	.75 inch	
Overall Drop	Metal Blades:	13 inches / 33 cm + downrod length
	Wood Blades:	16 inches / 41 cm + downrod length
Environment	Damp location with protective powder or clear coat only. Neither coastal, saltwater nor chlorine compatible.	

Warranty	Limited Lifetime
NEW JAN 21, 2020	DOE MOTOR EFFICIENCY DATA

UL / CUL

Soothing White Noise

Ambience

Safety Certification

Fan Head Options	Solid Mahogany Wood	Metal with Guard
Fan Diameter	16 inches / 41 cm	13 inches / 33 cm
Fan Blade Diameter	16 inches / 41 cm	13 inches / 33 cm
Guard Options	No Cage Option	Decorative Cage or Safety Cage with tight tines
RPM (Low / High)	955 / 1318	615 / 1149
CFM (Low / High)	1701 / 2368	800 / 1162
Watts (High)	46.77	48.39
CFM/Watt (High)	50.63	24.01
Blade Pitch	19°	31°

STANDARD EQUIPMENT

One downrod of 10 inches / 25 cm

Flat ceiling canopy (Not compatible with vaulted ceiling canopy) Decora-style, 3-speed wall control in white



Standard Finishes





Brushed Nickel Brushed Brass

Polished Brass


Special Order Finishes

Brushed Copper Polished Copper Polished Chrome Polished Chrome Damp Brushed Nickel Damp

Gloss White

Jarold Direcional

TECHNICAL SPECIFICATIONS

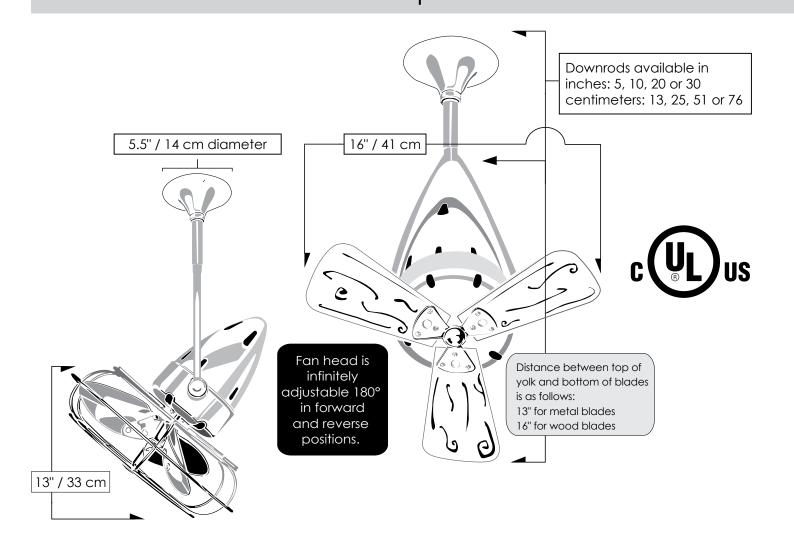

CEILING PITCH TABLE	
0/12	0 degrees
1/12	4.76 degrees
2/12	9.46 degrees
3/12	14.04 degrees
4/12	18.43 degrees
5/12	22.62 degrees
6/12	26.57 degrees
7/12	30.26 degrees
8/12	33.69 degrees
9/12	36.87 degrees
10/12	39.81 degrees
11/12	42.51 degrees

CEILING HEIGHT / DOWNROD Table	
Ceiling Height	Downrod Lengths Field cuttable. Non-threaded
10 ft or less	5 inches / 13 cm Use safety cages if applicable
10 -12 feet	10 inches / 25 cm
13 feet	20 inches / 51 cm
14 feet	30 inches / 76 cm

Matthews Fan Company

1881 Industrial Drive Libertyville, IL 60048 Tele: 847.680.9043 Fax: 847.680.8140 www.matthewsfanco.com

