

WAC LIGHTING

Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

J2 Track Octagon Box Cover

System Type	Model	Finish	
J2	UCP	BK	Black
		WT	White

Example: **J2-UCP-BK**

DESCRIPTION

120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. J2 Track is a two circuit track system that can control lighting fixtures separately through two switches. Any "J" style fixture can work on a J2 track system. J2 Track Covers are used to conceal electrical feed wires from the temp to the track live end connector.

FEATURES


- Octagon box cover, used with J2-IPWR, J2-LE, J2-LRIGHT, J2-LLEFT, J2-T and J2-X for octagon box feed
- 5 year warranty

SPECIFICATIONS

Finish: Electrostatically Powder Coated Black, White
Operating Temp: -4°F to 104°F (-20°C to 40°C)
Standards: UL, cUL, Dry Location Listed



FINISHES



Fixture Type: _____

Catalog Number: _____

Project: _____

Location: _____

J2 Track

120V Dual Circuit Track Section

System Type	Model & Size	Finish
J2	T4 4'	BK Black
	T8 8'	WT White
	T12 12'	

Example: **J2-T4-BK**

DESCRIPTION


120V Track systems are modular and can be designed for multiple applications in nearly any interior environment. J2 Track is a two circuit track system that can control lighting fixtures separately through two switches. Any "J" style fixture can work on a J2 track system. Versatile yet sturdy, track systems can be surface mounted or suspended from ceilings, enabling the lighting design to adapt to changing styles and spaces. Track may be field cut to size and combine power connectors, accessories, and suspension options to build a complete system.

FEATURES


- May be field cut and easily installed on a variety of surfaces
- End caps and mounting hardware included
- Retrofits into many popular track systems on the market today
- Compatible with all JHT and JTK series track luminaires
- Enables the use of two separately switched circuits on one section or run of track
- Saves on installation costs by eliminating the need for long separate feed run
- Each circuit is rated at 20A and allows the control of two individual sets of fixtures
- Not recommended for dimming on both circuits. If two circuit dimming is required use W track as alternate
- 5 year warranty

SPECIFICATIONS


Construction:	Aluminum extrusion with copper bus wire
Power:	1920W
Input:	120 VAC, 50/60Hz
Finish:	Electrostatically Powder Coated White, Black
Operating Temp:	-4°F to 104°F (-20°C to 40°C)
Standards:	UL, cUL, Dry Location Listed

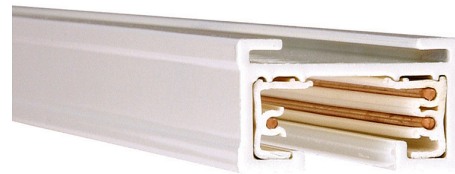

FINISHES



LINE DRAWING

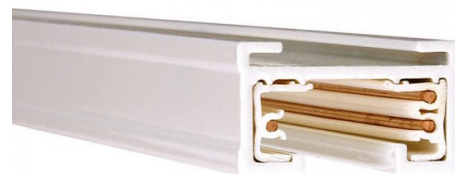

J2 System Adapter

