Collection:

Installation manual for:

LD6016 D8″ H10.5″ L1

Installation instructions:

1.Check all of the package contents before installation.
2. Install the mounting bracket (P1) to the outlet box using the screws (P2).
3. Connect the wire with L marking from the fixture to the BLACK wire from the Junction box.
4. Connect the wire with N marking from the fixture to the WHITE wire from the Junction box.
5.Loop the grounding wire(E wire) from the fixture under the head of the green ground screw on the mounting bracket(P1) and connect it to the grounding conductor from the supply circuit.
6.Adjust the angle of the fixture arms. Align the holes in the fixture with the mounting screws (P3) and secure it by screwing the ball nuts (P4).
7.Install E12 light source,no include bulb.
8. Connect the power.

The end!

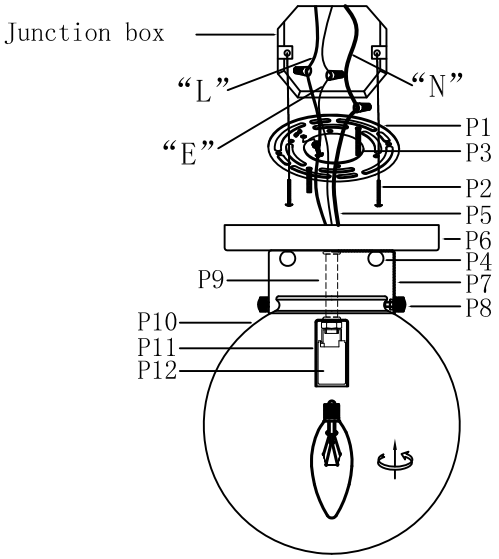

PARTS LIST

part	picture	Description	Qty	Check list
P1		D4″ Mounting bracket	1	
P2		5/32-32 Screw	2	
P3		5/32-32 Screw	2	
P4		Ball Nut	2	
P5		Power Cord 1.3',18AWG, Black&White	1	
P6		D6.7″ Canopy plat	1	
P7		D3.93" Metal Wire Box	1	
P8		Cap nut	2	
P9		L3″ Both end threaded pipe	1	
P10		D8″ Glass Shade	1	
P11		Socket cover	1	
P12		E12 Socket	1	

″L″ = Hot wire
″N″ = Neutral wire
″E″ = Ground wire